BENZA®

GENERATOR

ES5000

GENERATOR SPECIFICATIONS

Max. output	kW	5
Rated speed	rpm	3,000
Frequency	Hz	50
Rated Voltage	V	230
Noise level	dB(A)	97

ENGINE SPECIFICATIONS

Engine manufacturer		Robin
Model		EX27
Fuel		Petrol
Displacement	cc	265
Maximum power	HP	9
Nº. of cylinders		1
Starting system		Electric
Fuel tank capacity	L	6,1
Autonomy (75%)	H	3 h 40

SINGLE PHASE

50HZ

PETROL

ELETRIC START

ALTERNATOR SPECIFICATIONS

Alternator brand		Linz
Poles	Nº.	2
Protection rating		IP23
Insulation	Class	H
Voltage regulator		Capacitor
Earth circuit breaker		Yes
Single phase sockets	Nº.	2 x 230V – 16A units

STANDARD ACCESORIES

- Rubber wheels with bearings and metallic core
- Sturdy handle for ease of movement
- Earth circuit breaker to protect against direct electrical contacts
- Tubular steel chassis with three protection plates (front, upper and lateral)
- Shock absorbers to protect the engine and the alternator
- Support stand with shock absorber to protect from strong blows

OPTIONS

- Grounding rod
- AVR – Automatic voltage regulator

DIMENSIONS & WEIGHT

Length	mm	750
Width	mm	690
Height	mm	580
Weight	kg	80,4

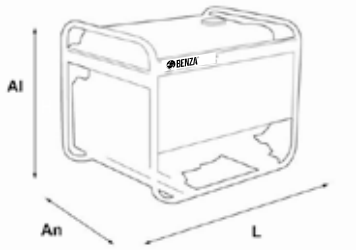

internaco

15680 Órdenes (La Coruña) · España
Tel. +34 981 680 101 · Fax +34 981 680 353
contactcenter@internaco.com · www.internaco.com
export@internaco.com · www.benza.es