BENZA®

GENERATOR

TRS12000

GENERATOR SPECIFICATIONS

Max. output	kVA	12
Rated speed	rpm	3,000
Frequency	Hz	50
Rated Voltage	V	400
Noise level	dB(A)	99

ENGINE SPECIFICATIONS

Engine manufacturer		Loncin
Model		LC2VB0FD
Fuel		Petrol
Displacement	cc	653
Maximum power	HP	22
Nº. of cylinders		2
Starting system		Electric
Fuel tank capacity	L	50
Autonomy (75%)	H	10 h

ALTERNATOR SPECIFICATIONS

Alternator brand		Sincro
Poles	Nº.	2
Protection rating		IP23
Insulation	Class	H
Voltage regulator		Compound
Earth circuit breaker		Yes
Three phase sockets	Nº.	1 unit 400V – 16A
Single phase sockets	Nº.	1 unit 230V – 16A schuko

STANDARD ACCESORIES

- Rubber wheels with bearings and metallic core
- Sturdy handle for ease of movement
- Earth circuit breaker to protect against direct electrical contacts
- Covered steel frame
- Shock absorbers to protect the engine and the alternator
- Towing hook
- Wide, 50 l capacity tank attached to the chassis (for up to 10 h operation)

OPTIONS

- Grounding rod
- AVR – Automatic voltage regulator

DIMENSIONS & WEIGHT

Length	mm	870
Width	mm	800
Height	mm	860
Weight	kg	185

THREE PHASE

50HZ

PETROL

ELETRIC START

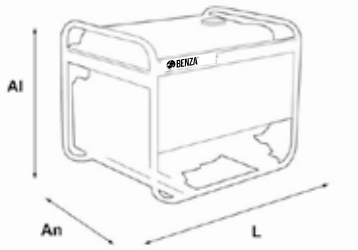

internaco

15680 Órdenes (La Coruña) · España
Tel. +34 981 680 101 · Fax +34 981 680 353
contactcenter@internaco.com · www.internaco.com
export@internaco.com · www.benza.es